










CAMILLA



- Rectangular luminaire for installation in the wall – recessed.
- Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: sandblasted with silkscreen border, fixed to the aluminium structure through a robotic gluing system.
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65
- In compliance with EN 60598-1 standards
- Class of insulation: mains: I; LED module: I, III; RGB: III
- Installation: Electrical components housed into the removable back side. Wiring through two M16 cable glands for (4,5\times10mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland. Installation requires a dedicated box to be ordered separately.

EU Regulation 874/2012 - Illumination equipment energy classes


	LED VERSION: Class A/A+/A++ Luminaire supplied with integrated LED modules that cannot be replaced
	
	
	FLUORESCENT VERSION: Class A TC-SEL/2G7





Camilla / L 230 mm - Sandblasted Glass




115141111
TC-SEL 9W 2G7
Electronic ballast

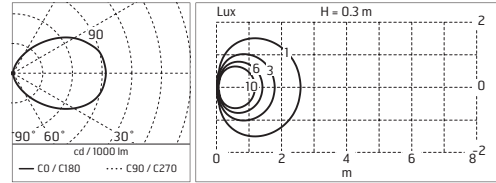

Camilla Mid-Power LED / L 230 mm - Diffused light




115147113
NATURAL WHITE 4000K
MID-POWER LEDs
4W/100÷240V
Total power 7W
lm LED 557 ≠ lm OUTPUT 112
CRI >80
Integral electronic power supply

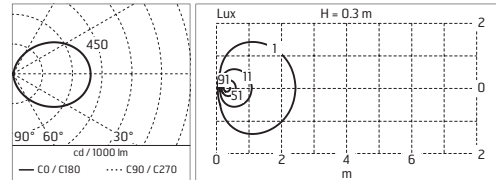


115147112
WARM WHITE 3000K
MID-POWER LEDs
4W/100÷240V
Total power 7W
lm LED 530 ≠ lm OUTPUT 106
CRI >80
Integral electronic power supply

115147115
NATURAL WHITE 4000K
MID-POWER LEDs
4W/24Vdc
Total power 5W
lm LED 557 ≠ lm OUTPUT 112
CRI >80
Remote electronic power supply
to be ordered
 Acc. 144 or 176

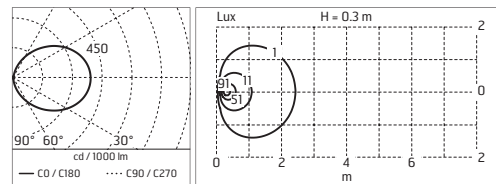


115147114
WARM WHITE 3000K
MID-POWER LEDs
4W/24Vdc
Total power 5W
lm LED 530 ≠ lm OUTPUT 106
CRI >80
Remote electronic power supply
to be ordered
 Acc. 144 or 176


Camilla / L 300 mm - Sandblasted Glass




115141110
TC-SEL 11W 2G7
Electronic ballast

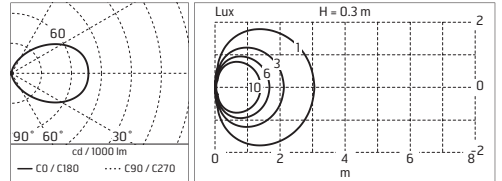

Camilla Mid-Power LED / L 300 mm - Diffused light




115147117
NATURAL WHITE 4000K
MID-POWER LEDs
6W/100÷240V
Total power 10W
lm LED 835± lm OUTPUT 168
CRI >80
Integral electronic power supply

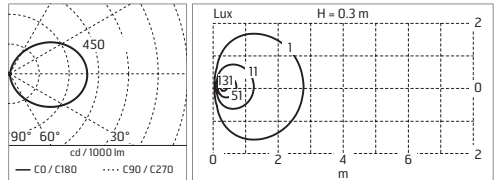

115147116
WARM WHITE 3000K
MID-POWER LEDs
6W/100÷240V
Total power 10W
lm LED 795± lm OUTPUT 160
CRI >80
Integral electronic power supply

115147119
NATURAL WHITE 4000K
MID-POWER LEDs
6W/24Vdc
Total power 7,5W
lm LED 835± lm OUTPUT 168
CRI >80
Remote electronic power supply
to be ordered
...|||Acc. 144 or 176

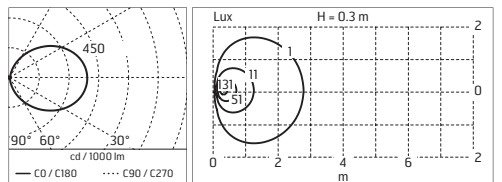


115147118
WARM WHITE 3000K
MID-POWER LEDs
6W/24Vdc
Total power 7,5W
lm LED 795± lm OUTPUT 160
CRI >80
Remote electronic power supply
to be ordered
...|||Acc. 144 or 176




Accessories: Camilla


123
BOX FOR INSTALLATION
255 x 110 x H 95mm




124
BOX FOR INSTALLATION
325 x 110 x H 95mm




106
POWER SUPPLY DUAL FUNCTION
Vout 24Vdc: 8W/100±240V
Iout 350mA: 6x1W/100±240V
IP65 CLASS II SELV EQ.




87
POWER SUPPLY 10W/110±240V -
24Vdc IP20 CLASS II SELV.




175
POWER SUPPLY 10W/110±240V - 24Vdc
IP67 CLASS II SELV.




144
POWER SUPPLY 17W/110±240V - 24Vdc
(15W@110V) IP20 CLASS II SELV.



176
POWER SUPPLY 17W/110±240V - 24Vdc
(15W@110V) IP67 CLASS II SELV.




155
POWER SUPPLY 50W/120±240V - 24Vdc
IP67 CLASS II SELV.




... DIMMABLE: PUSH-DIM OR 1...10V
See Page 514 Wiring Diagram n.4

... DIMMABLE: PUSH-DIM OR 1...10V
See Page 514 Wiring Diagram n.4


110
POWER SUPPLY 70W/220±240V - 24Vdc
IP67 CLASS II SELV EQ.



156
POWER SUPPLY 96W /120±277V - 24Vdc
IP67 CLASS II SELV.



237
SPD: (SURGE PROTECTION DEVICE) 275Vac
MAXIMUM DISCHARGE CURRENT 10kA(8/20µs)
MAXIMUM OPERATING CURRENT 5A
SUITABLE FOR SERIES CONNECTION - IP66



acc. code ▶	123	124	106	87	175	144	176	155	110	156	237
prod. code ▼											
115141110		•									
115141111	•										
115147112	•										•
115147113	•										•
115147114	•		1	2	2	3	3	10	13	18	
115147115	•		1	2	2	3	3	10	13	18	
115147116		•									•
115147117		•									•
115147118		•	1	1	1	2	2	6	8	12	
115147119		•	1	1	1	2	2	6	8	12	

Max fixtures for each power supply (Vin 220±240). Data in the chart are provided as a guide only. Please verify according to your installation.