



GIULIA

- Round luminaire for installation on wall or ceiling – surface mounted.
- Configuration: die-cast aluminium structure and frame, EN AB-47100 alloy (low copper content). Polycarbonate diffuser: opal with satin finish.
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65
- In compliance with EN60598-1 standards
- Class of insulation: I
- Installation: the luminaire is equipped with two cable holders and a three-pole quick-connection terminal. Giulia Ø200 and Ø300: 5mm \varnothing <math><10\text{mm}</math> cables. Giulia Ø400: 6mm \varnothing <math><13\text{mm}</math> cables. Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

EU Regulation 874/2012 - Illumination equipment energy classes

A++
A+
A

LED VERSION:
Class A/A+/A++
Luminaire supplied with integrated LED modules that cannot be replaced



Ceiling fitting



Wall fitting






The fitting is equipped with 2 cable input




Protection against impact. IK 08- 5,00 joule

Giulia200 Mid-Power LED






544001 **A A+ A++**
 NATURAL WHITE 4000K
 MID-POWER LEDs
 8,7W/220÷240V
 Total power 11W
 Lm LED 1325 ≠ Lm OUTPUT 802
 CRI>80
 Integral electronic power supply

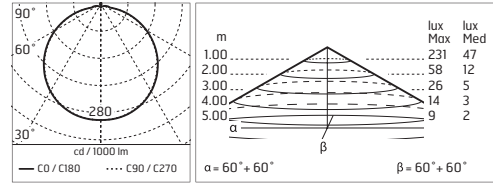


544002 **A A+ A++**
 WARM WHITE 3000K
 MID-POWER LEDs
 8,7W/220÷240V
 Total power 11W
 Lm LED 1261 ≠ Lm OUTPUT 765
 CRI>80
 Integral electronic power supply

Giulia300 Mid-Power LED






544003 **A A+ A++**
 NATURAL WHITE 4000K
 MID-POWER LEDs
 14,1W/220÷240V
 Total power 18W
 Lm LED 2153 ≠ Lm OUTPUT 1258
 CRI>80
 Integral electronic power supply
 ■■■ Dimmable on request

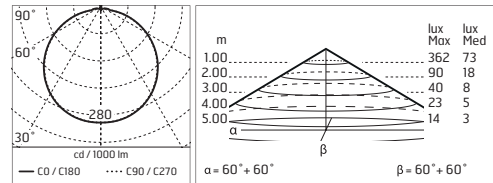


544004 **A A+ A++**
 WARM WHITE 3000K
 MID-POWER LEDs
 14,1W/220÷240V
 Total power 18W
 Lm LED 2049 ≠ Lm OUTPUT 1200
 CRI>80
 Integral electronic power supply
 ■■■ Dimmable on request


Giulia400 Mid-Power LED



544005 **A A+ A++**
 NATURAL WHITE 4000K
 MID-POWER LEDs
 27,9W/110÷240V
 Total power 34W
 Lm LED 4318 ≠ Lm OUTPUT 2340
 CRI>80
 Integral electronic power supply
 ■■■ Dimmable on request

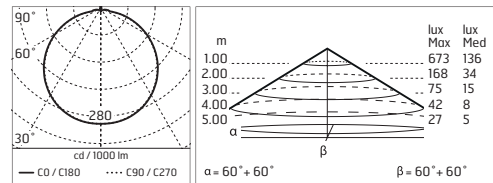


544006 **A A+ A++**
 WARM WHITE 3000K
 MID-POWER LEDs
 27,9W/110÷240V
 Total power 34W
 Lm LED 4109 ≠ Lm OUTPUT 2232
 CRI>80
 Integral electronic power supply
 ■■■ Dimmable on request

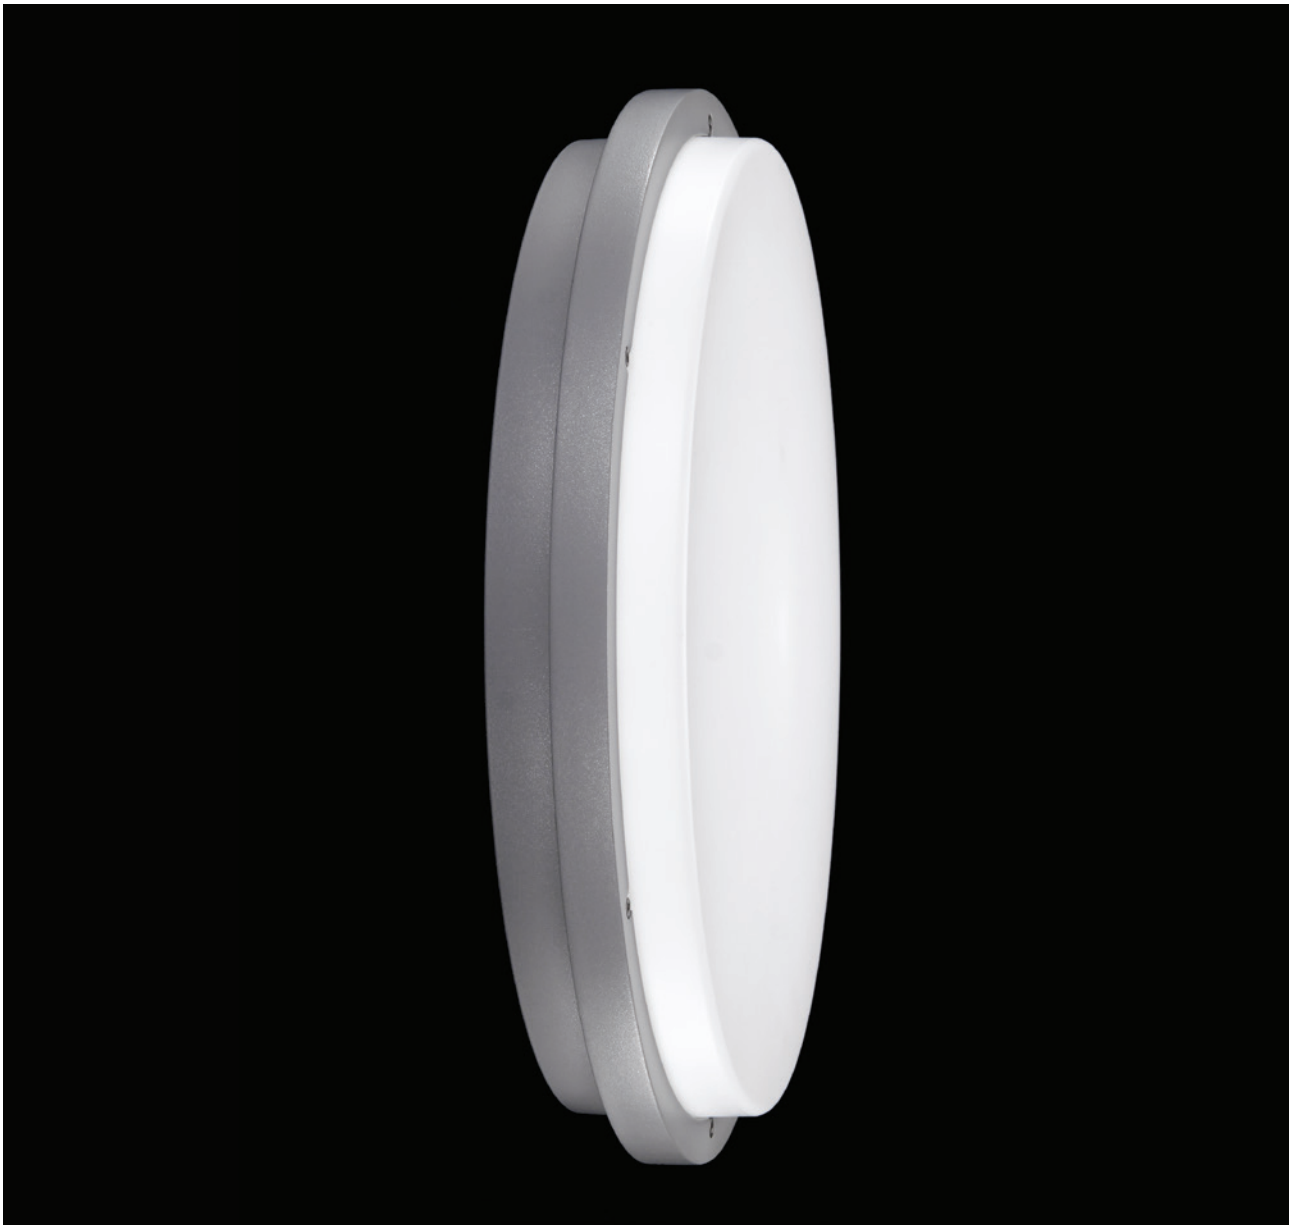

Accessories: Giulia

237
 SPD: (SURGE PROTECTION DEVICE) 275Vac
 MAXIMUM DISCHARGE CURRENT 10kA (8/20µs)
 MAXIMUM OPERATING CURRENT 5A
 SUITABLE FOR SERIES CONNECTION - IP66



acc. code ▶	237
prod. code ▼	
544001	●
544002	●
544003	●
544004	●
544005	●
544006	●