

NUVOLA WALL CEILING

Mario Bellini

Pendant, ceiling/wall and floor lamps. in natural opal polyethylene, in rotational printing. The floor version is also outdoor. Diffused lighting for a widespread and comfortable output. The pendant version is fastened to the ceiling with three suspension cables, adjustable with an outline included in the package. White canopy freely adjustable on the ceiling. The ceiling/wall version is composed by one of the two blocs (deep or flat, to choose) while the IP44 outdoor version has adjustable feet with possibility of ground fixing. All versions are dimmable. For the pendant version, DALI driver on request.



LED H20

LAMPING

Source	LED
Total power	80W
Emission	diffused
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	7900lm
Typ cri	80
Energy class	A+
Materials	polyethylene

Codes

NUV LWW 31

Structure


white

PACKAGE

Package 01

93x150x65 cm / Gross weight: 19 Kg

Certificazioni

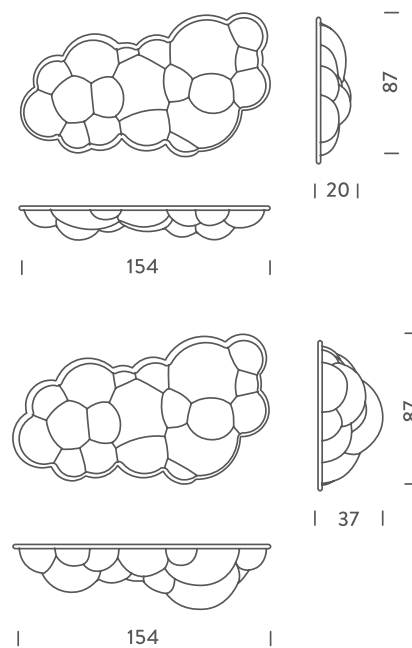

LED H37

LAMPING

Source	LED
Total power	80W
Emission	diffused
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	7900lm
Typ cri	80
Energy class	A+
Materials	polyethylene

Codes

NUV LWW 32

Structure

white

PACKAGE

Package 01

93x150x65 cm / Gross weight: 19 Kg

Certificazioni

