


ISI 24X24

Giancarlo Tintori

Family of no trim LED and fluorescent recessed downlights fixtures for diffused lighting. Matt white powder-coated aluminium structure with opal polycarbonate.

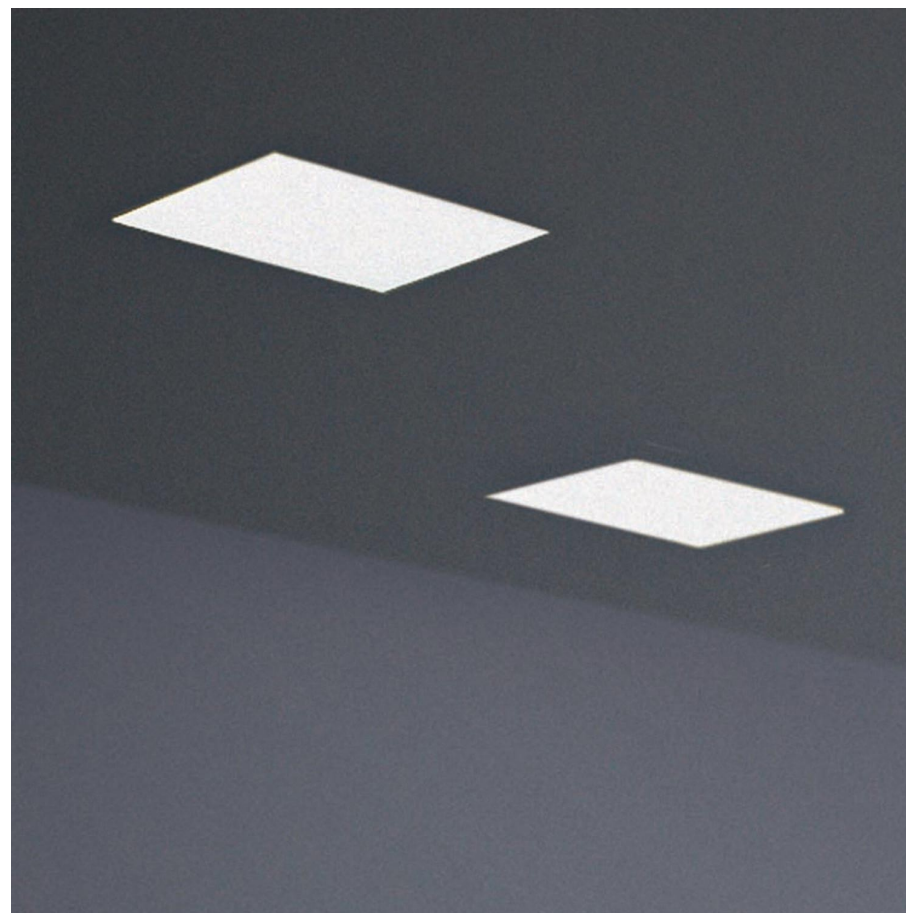

LED

LAMPING

Source	LED board
Total power	45W
Emission	diffused
Switching	dimmable 0-10
Tension	230V
Color temperature	2700K
Luminous flux	5700lm
Typ cri	80
Materials	Aluminium/plexiglass opal
Notes	recessed hole 28×28×H min 12 cm

Codes

ISI LWW 63

Structure

white

Certificazioni

