





- Luminaire for installation on wall or on ceiling – surface mounted.
- Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Polycarbonate diffuser: opal, self-extinguishing.
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65.
- In compliance with EN 60598-1 standards.
- Class of insulation: I.
- Installation: Mini Pat: wiring through one rubber cable gland (5mm<math>\varnothing</math><math><9\text{mm}</math> cables); Pat - Maxi Pat: wiring through a rubber cable holder (5mm<math>\varnothing</math><math><10\text{mm}</math> cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland / cable holder.

EU Regulation 874/2012 - Illumination equipment energy classes



<b>A</b>	↓	<b>FLUORESCENT VERSION:</b> Class A TC-DEL/G24q-1 TC-DEL/G24q-2 TC-DEL/G24q-3 TC-SEL/2G7
<b>D</b>	↓	<b>HALOGEN VERSION:</b> Class D QT32/E27 D45/E14

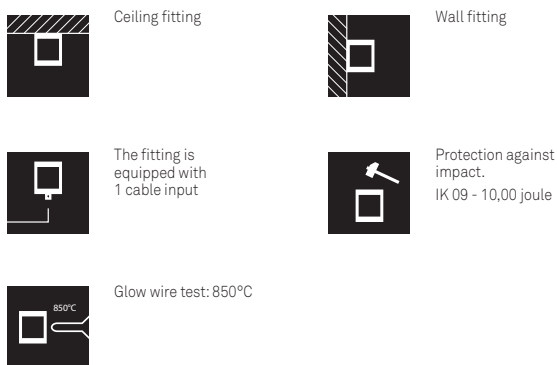



## MiniPat




**421100** D  
D45 40W E14





**425700** A  
TC-DEL 10W G24q-1  
Electronic ballast





## Pat / All-light





**430123** D  
QT 32 100W E27




**434123** A  
TC-SEL 2x9W 2G7  
Electronic ballast




**436023** A  
TC-DEL 2x18W G24q-2  
Electronic ballast




## Pat / Louvre




**430105 D**  
QT 32 100W E27

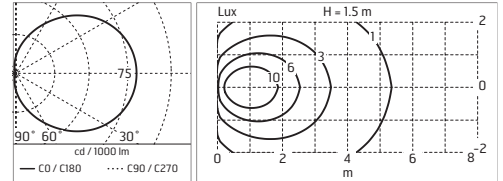


**434105 A**  
TC-SEL 2x9W 2G7  
Electronic ballast

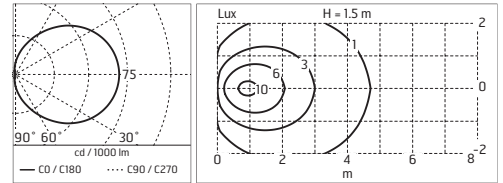


**436005 A**  
TC-DEL 2x18W G24q-2  
Electronic ballast

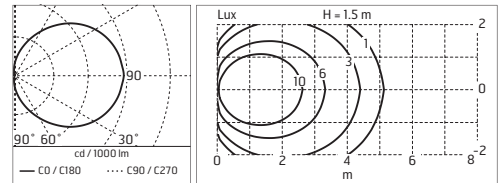


## Pat / Half Louvre




**430110 D**  
QT 32 100W E27

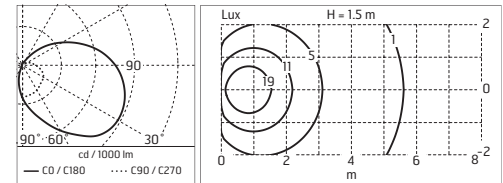

**434110 A**  
TC-SEL 2x9W 2G7  
Electronic ballast

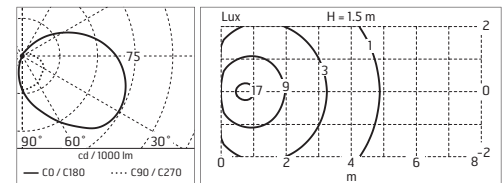




**436010 A**  
TC-DEL 2x18W G24q-2  
Electronic ballast

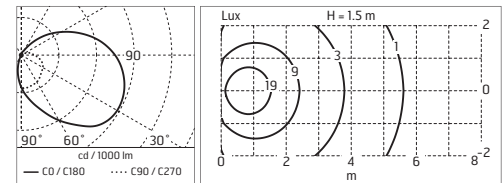



Pat / Visor





**430107** D  
QT 32 100W E27



**434107** A  
TC-SEL 2x9W 2G7  
Electronic ballast






**436007** A  
TC-DEL 2x18W G24q-2  
Electronic ballast




Pat / Emergency (Autonomy: 1h 30 min) - The emergency unit and the power supply unit have a common neutral





**455923** A  
TC-DEL 18W G24q-2  
Electronic ballast





MaxiPat




440223 **D**  
QT 32 2x75W E27



446223 **A**  
TC-DEL 2x26W G24q-3  
Electronic ballast



MaxiPat / Emergency (Autonomy: 1h 30 min) - The emergency unit and the power supply unit have a common neutral



456223 **A**  
TC-DEL 2x26W G24q-3  
Electronic ballast

