# NORMA

Steve Blackman and Mario Barbaglia

LED and halogen wall lamps with widespread light. Tube diffuser in sandblasted Pyrex or in opal metacrylate (LED), mounted on a glossy polished aluminium structure.



### 25 HALO

#### LAMPING

Source Total power Emission Switching Tension Ip class Materials Notes

R7s (114mm)
250W
diffused
dimmable
230V
40
glass + aluminium
horizontal mounting only, GLASS diffuser

Structure/Diffuser

polished/opal white

#### Codes

NOR HLW 31


#### PACKAGE


Package 01


37x36x14 cm / Gross weight: 2.5 Kg

#### Certificazioni

CE ERE IP40







### 25 LED

#### LAMPING

Source	LED board
Total power	20W
Emission	diffused
Tension	110/230V
Color temperature	3000K
Luminous flux	2000lm
Тур сгі	83
Energy class	A+
lp class	40
Materials	PMMA + aluminium
Notes	horizontal and vertical mounting

Structure/Diffuser

polished/opal white

37x36x14 cm / Gross weight: 2.5 Kg

### Codes


NOR LLW 35


#### PACKAGE


Package 01

### Certificazioni









### 65 HALO

#### LAMPING

Source Total power Emission Switching Tension lp class Materials Notes

#### Codes

NOR HLW 32

#### PACKAGE

Package 01


35x75x15 cm / Gross weight: 4 Kg

230V

40

### Certificazioni

CEERE IP40

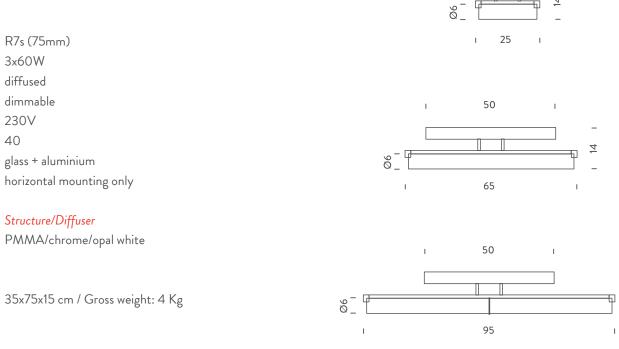

ı 20 ı

4

\_

14,5

\_

### 65 LED

#### LAMPING

Source	LED board
Total power	20W
Emission	diffused
Switching	dimmable, E
Tension	230V
Color temperature	3000K
Luminous flux	2200lm
Тур сгі	83
Energy class	A+
lp class	40
Materials	PMMA + al
Notes	horizontal a

Codes

NOR LLW 32

#### PACKAGE


Package 01

Certificazioni

CE ERE IP40

LED board
20W
diffused
dimmable, DALI push
230V
3000K
2200lm
83
A+
40
PMMA + aluminium
horizontal and vertical mounting

#### Structure/Diffuser PMMA/chrome/opal white



ı 20 ı


25

90 \_

1

4

Т



35x75x15 cm / Gross weight: 4 Kg

### 95 LED

#### LAMPING

Source	LED board
Total power	35W
Emission	diffused
Switching	dimmable, [
Tension	230V
Color temperature	3000K
Luminous flux	3300lm
Typ cri	83
Energy class	A+
lp class	40
Materials	PMMA + al
Notes	horizontal a

### Codes

NOR LLW 33

#### PACKAGE


Package 01

## Certificazioni

CE ERE IP40

35W
diffused
dimmable, DALI push
230V
3000K
3300lm
83
A+
40
PMMA + aluminium
horizontal and vertical mounting

#### Structure/Diffuser PMMA/chrome/opal white



Т

T

35x110x15 cm / Gross weight: 6 Kg

ı 20 ı

