










- Luminaire for installation on wall – surface mounted.
- Configuration: polycarbonate structure and die-cast aluminium cover and base (MaxiMelrie only), EN AB-47100 alloy (low copper content)
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65
- In compliance with EN 60598-1 standards
- Class of insulation: Melrie: II; MaxiMelrie: I
- Installation: Melrie: wiring through two rubber cable holders (5mm<math>\times</math>10mm cables); MaxiMelrie: wiring through two rubber cable holders (8mm<math>\times</math>13mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

## EU Regulation 874/2012 - Illumination equipment energy classes

    	<p><b>LED VERSION:</b> Class A/A+/A++ Luminaire supplied with integrated LED modules that cannot be replaced</p> <p><b>FLUORESCENT VERSION:</b> Class A TC-DEL/G24q-1 TC-DEL/G24q-3</p> <p><b>HALOGEN VERSION:</b> Class D QT26/E14</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Wall fitting





The fitting is equipped with 2 cable input








Protection against impact.  
IK 09 - 10,00 joule



## Melrie / Unidirectional




**481121**    
QT 26 40W E14








**485721**    
TC-DEL 13W G24q-1  
Electronic ballast







## Melrie / Bidirectional




**481122**    
QT 26 40W E14









**485722**    
TC-DEL 13W G24q-1  
Electronic ballast






## Melrie Mid-Power LED / Unidirectional



**483001**     
NATURAL WHITE 4000K  
MID-POWER LEDs  
5,5W/220÷240V  
Total power 8W  
Lm LED 806 ≈ Lm OUTPUT 510  
CRI>80  
Integral electronic power supply



**483002**     
WARM WHITE 3000K  
MID-POWER LEDs  
5,5W/220÷240V  
Total power 8W  
Lm LED 768 ≈ Lm OUTPUT 486  
CRI>80  
Integral electronic power supply




Melrie Mid-Power LED / Bidirectional



483003 **A A+ A++**

NATURAL WHITE 4000K  
MID-POWER LEDs  
11W/220÷240V  
Total power 14W  
Lm LED 2x806 ≠ Lm OUTPUT 2x510  
CRI>80


Integral electronic power supply



483004 **A A+ A++**

WARM WHITE 3000K  
MID-POWER LEDs  
11W/220÷240V  
Total power 14W  
Lm LED 2x768 ≠ Lm OUTPUT 2x486  
CRI>80




Integral electronic power supply

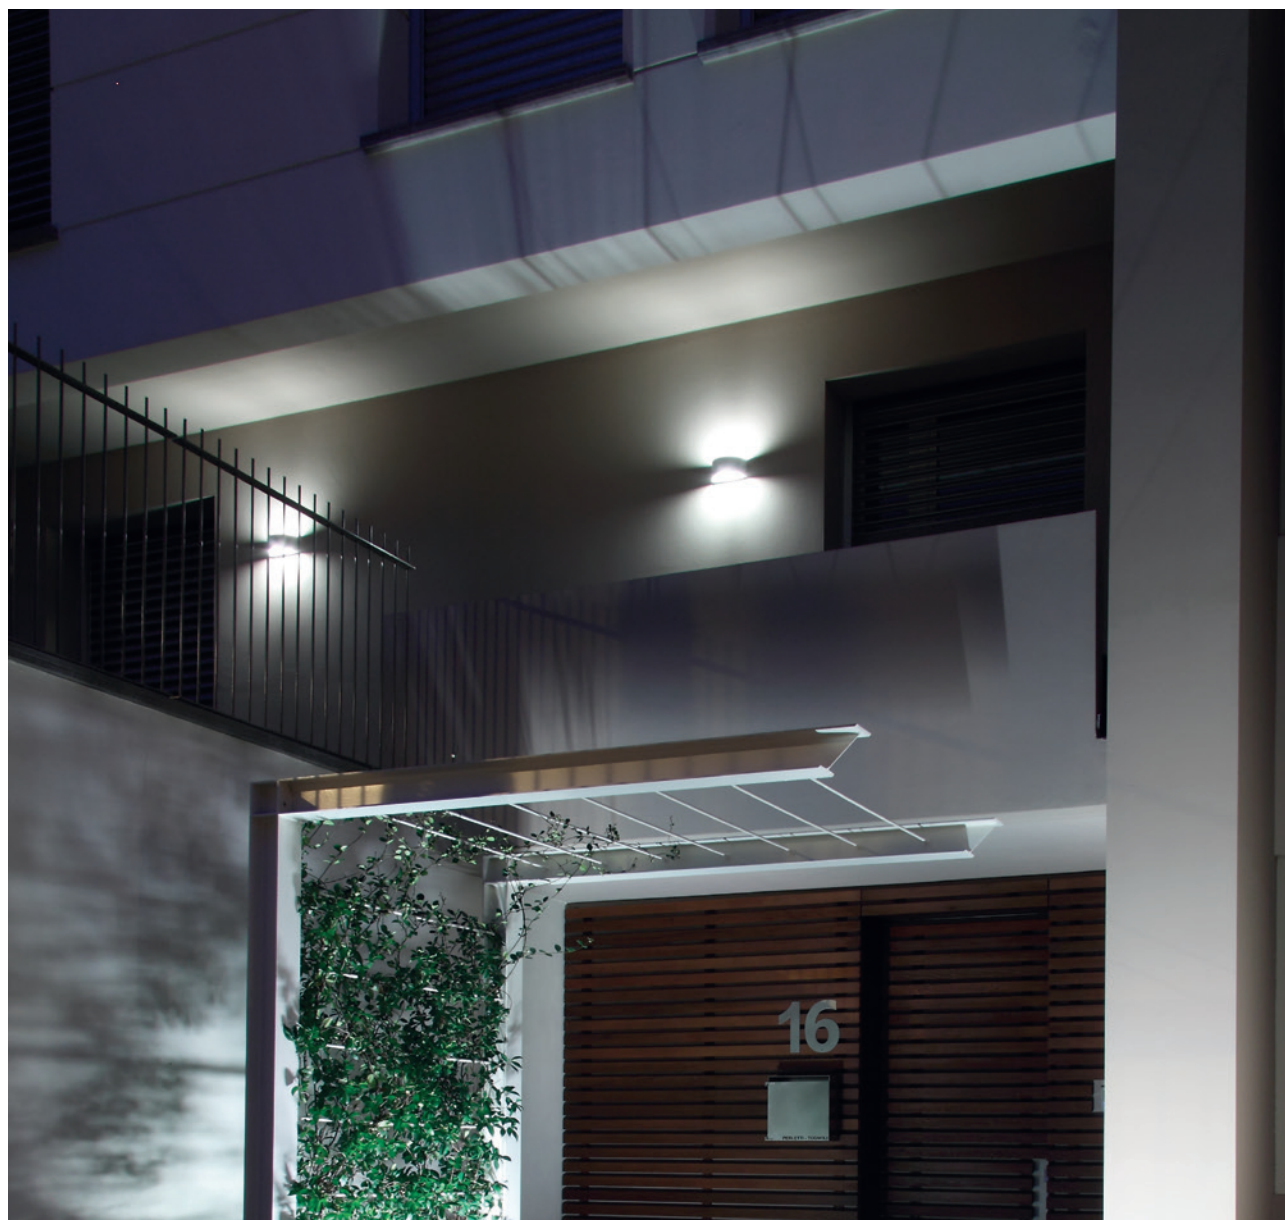


### MaxiMelrie / Unidirectional






**486121**   
TC-DEL 26W G24q-3  
Electronic ballast



### MaxiMelrie / Bidirectional






**486122**   
TC-DEL 26W G24q-3  
Electronic ballast



### MaxiMelrie Mid-Power LED / Unidirectional





**4827421**   
NATURAL WHITE 4000K  
MID-POWER LEDs  
8,8W/220÷240V  
Total power 12W  
Lm LED 1291 ≠ Lm OUTPUT 817  
CRI>80  
Integral electronic power supply



**4827521**   
WARM WHITE 3000K  
MID-POWER LEDs  
8,8W/220÷240V  
Total power 12W  
Lm LED 1230 ≠ Lm OUTPUT 778  
CRI>80  
Integral electronic power supply



MaxiMelrie Mid-Power LED / Bidirectional



4827422 A A+ A++

NATURAL WHITE 4000K  
MID-POWER LEDs  
17,6W/220÷240V  
Total power 18W  
Lm LED 2x1291 ≠ Lm OUTPUT 2x817  
CRI>80

Integral electronic power supply



4827522 A A+ A++


WARM WHITE 3000K  
MID-POWER LEDs  
17,6W/220÷240V  
Total power 18W  
Lm LED 2x1230 ≠ Lm OUTPUT 2x778  
CRI>80

Integral electronic power supply



Accessories: Melrie

237  
SPD: (SURGE PROTECTION DEVICE) 275Vac  
MAXIMUM DISCHARGE CURRENT 10kA (8/20µs)  
MAXIMUM OPERATING CURRENT 5A  
SUITABLE FOR SERIES CONNECTION - IP66



acc. code	▶	237
prod. code	▼	
483001		●
483002		●
483003		●
483004		●
481121		
485721		
481122		
485722		
486121		
486122		
4827421		●
4827521		●
4827422		●
4827522		●