













PAOLA

- Luminaire for installation on wall or on ceiling – surface mounted.
- Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: transparent or sandblasted, fixed to the aluminium frame through a robotic gluing system.
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65.
- In compliance with EN 60598-1 standards.
- Class of insulation: I.
- Installation: Paolina: wiring through a PG9 nickel-plated brass cable gland (3,5mm\times8mm cables); Paola: wiring through two M16 plastic cable glands (4,5mm\times10mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

EU Regulation 874/2012 - Illumination equipment energy classes

	LED VERSION: Class A/A+/A++ Luminaire supplied with integrated LED modules that cannot be replaced
	
	
	FLUORESCENT VERSION: Class A TC-TEL/Gx24q-2
	
	FLUORESCENT VERSION: Class A TC-D/G24d-3
	
	HALOGEN VERSION: Class C/D QT-DE12/R7s
	
	HALOGEN VERSION: Class D QT32/E27 QT-DE12/R7s



Ceiling fitting



Wall fitting



Paolina is equipped with 1 cable input




Paola is equipped with 2 cable input





Protection against impact.
IK 08 - 5,00 joule for Paola
IK 07 - 2,00 joule for Paolina



Paolina / All-light - Sandblasted Glass




891823 **D C**
QT-DE 12 60W R7s (75mm)





898523 **A**
TC-TEL 18W GX24q-2
Electronic ballast





Paolina / Directional Louvre - Sandblasted Glass




891805 **D C**
QT-DE 12 60W R7s (75mm)





898505 **A**
TC-TEL 18W GX24q-2
Electronic ballast



Paolina / Transparent Glass - Asymmetric Optic - Internal Visor






891814 **D C**
QT-DE 12 60W R7s (75mm)



Paolina Power LED / Transparent Glass - Symmetric Optic - Narrow Beam 10°




8922812 **A A+ A++**
 NATURAL WHITE 4000K
 POWER LEDs
 9,9W /220÷240V
 Total power 12W
 Lm LED 1026 ≠ Lm OUTPUT 939
 CRI>80
 Integral electronic power supply



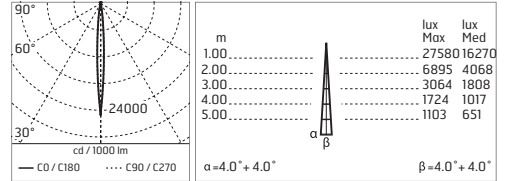


8911012 **A A+ A++**
 WARM WHITE 3000K
 POWER LEDs
 9,9W /220÷240V
 Total power 12W
 Lm LED 963 ≠ Lm OUTPUT 848
 CRI>80
 Integral electronic power supply

Paolina Power LED / Transparent Glass - Symmetric Optic - Medium Beam 40°



8922823 **A A+ A++**
 NATURAL WHITE 4000K
 POWER LEDs
 9,9W /220÷240V
 Total power 12W
 Lm LED 1026 ≠ Lm OUTPUT 820
 CRI>80
 Integral electronic power supply



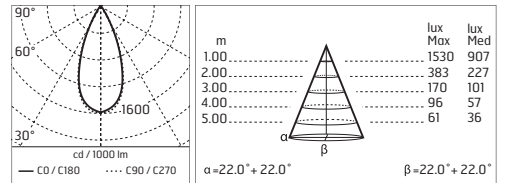


8911023 **A A+ A++**
 WARM WHITE 3000K
 POWER LEDs
 9,9W /220÷240V
 Total power 12W
 Lm LED 963 ≠ Lm OUTPUT 742
 CRI>80
 Integral electronic power supply

Paolina Power LED / Sandblasted Glass - Symmetric Optic




8922857 **A A+ A++**
 NATURAL WHITE 4000K
 POWER LEDs
 9,9W /220÷240V
 Total power 12W
 Lm LED 1026 ≠ Lm OUTPUT 531
 CRI>80
 Integral electronic power supply

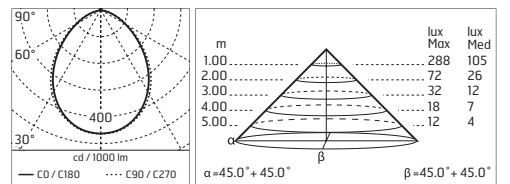



8911057 **A A+ A++**
 WARM WHITE 3000K
 POWER LEDs
 9,9W /220÷240V
 Total power 12W
 Lm LED 963 ≠ Lm OUTPUT 480
 CRI>80
 Integral electronic power supply





Paola / All-light - Sandblasted Glass - Symmetric Optic





890200 D
QT 32 2x60W E27





891400 D
QT-DE 12 150W R7s




896000 A
TC-DEL 2x18W G24q-2
Electronic ballast





891600 B A
TC-D 2x26W G24d-3





Paola / Transparent Glass - Asymmetric Optic - Internal Visor



891414 D
QT-DE 12 150W R7s






896114 A
TC-DEL 26W G24q-3
Electronic ballast



Paola Power LED / Transparent Glass - Symmetric Optic - Narrow Beam 10°



8922412 A A+ A++
 NATURAL WHITE 4000K
 POWER LEDs
 17,6W /220÷240V
 Total power 20W
 Lm LED 1824 ≠ Lm OUTPUT 1588
 CRI>80
 Integral electronic power supply



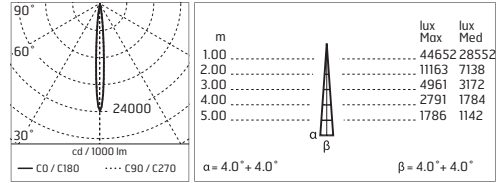


8910112 A A+ A++
 WARM WHITE 3000K
 POWER LEDs
 17,6W /220÷240V
 Total power 20W
 Lm LED 1712 ≠ Lm OUTPUT 1435
 CRI>80
 Integral electronic power supply

Paola Power LED / Transparent Glass - Symmetric Optic - Medium Beam 40°



8922423 A A+ A++
 NATURAL WHITE 4000K
 POWER LEDs
 17,6W /220÷240V
 Total power 20W
 Lm LED 1824 ≠ Lm OUTPUT 1368
 CRI>80
 Integral electronic power supply


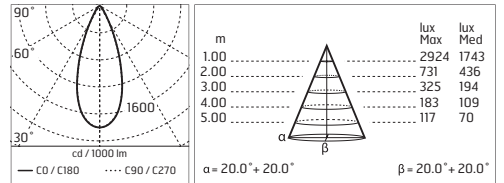


8910123 A A+ A++
 WARM WHITE 3000K
 POWER LEDs
 17,6W /220÷240V
 Total power 20W
 Lm LED 1712 ≠ Lm OUTPUT 1237
 CRI>80
 Integral electronic power supply

Paola Power LED / Sandblasted Glass - Symmetric Optic



8922457 A A+ A++
 NATURAL WHITE 4000K
 POWER LEDs
 17,6W /220÷240V
 Total power 20W
 Lm LED 1824 ≠ Lm OUTPUT 1103
 CRI>80
 Integral electronic power supply

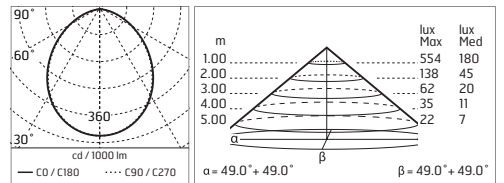


8910157 A A+ A++
 WARM WHITE 3000K
 POWER LEDs
 17,6W /220÷240V
 Total power 20W
 Lm LED 1712 ≠ Lm OUTPUT 999
 CRI>80
 Integral electronic power supply



Accessories: Paola

237

SPD; (SURGE PROTECTION DEVICE) 275Vac
 MAXIMUM DISCHARGE CURRENT 10KA (8/20µs)
 MAXIMUM OPERATING CURRENT 5A
 SUITABLE FOR SERIES CONNECTION - IP66



acc. code ▶	237
prod. code ▼	
890200	
891400	
891414	
891600	
891805	
891814	
891823	
896000	
896114	
898505	
898523	
8910112	●

acc. code ▶	237
prod. code ▼	
8910123	●
8910157	●
8911012	●
8911023	●
8911057	●
8922412	●
8922423	●
8922457	●
8922812	●
8922823	●
8922857	●