


LINESCAPES SYSTEM

Linescapes is a modular system that is completely changing the approach to high performance diffused direct and indirect lighting. The singular modules are connected by quick moulded ABS connectors, which enable rapid jack installation and a 360° rotation. The different elements allow the composition of continuous lines and edges, with a luminous efficiency and an excellent diffusion degree, through an opaline diffuser in polycarbonate. The system has been studied to provide user friendly maintenance. Nemo has efficiently solved the problem of replacing LED built-in sources, whereby the single lighting elements can be easily changed.

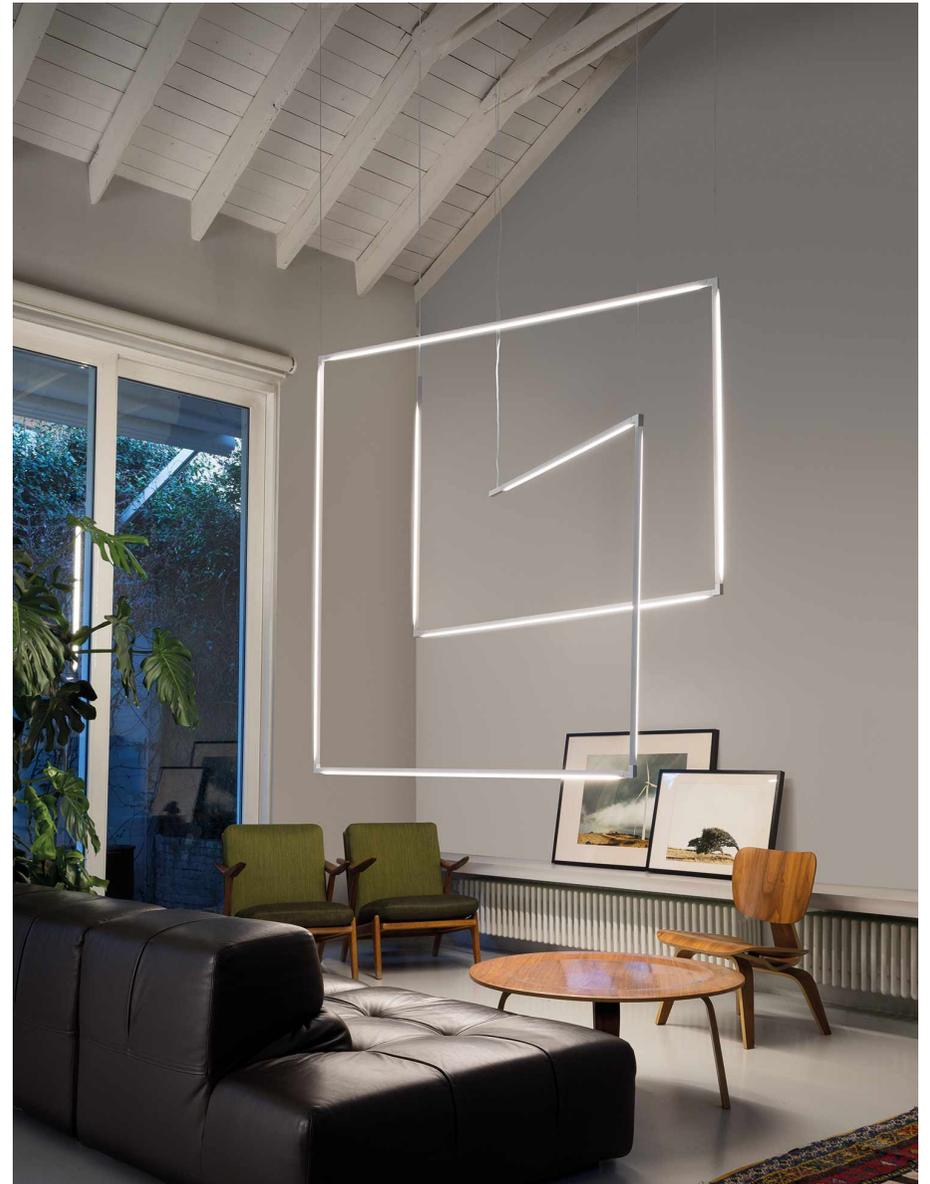

SEGMENT LED | 36 CM

LAMPING

Source	linear LED
Total power	6W
Emission	diffused, orientable 360°
Tension	24V DC
Color temperature	3000K
Luminous flux	430lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS


Codes

LSS LN4 51
LSS LW4 51

Structure

black
white

Certificazioni

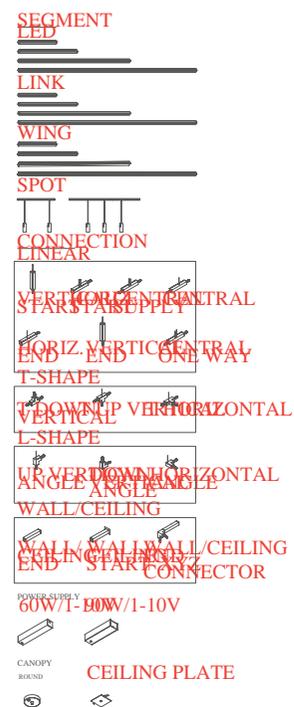

SEGMENT LED | 56 CM

LAMPING

Source	linear LED
Total power	12W
Emission	diffused, orientable 360°
Tension	24V DC
Color temperature	3000K
Luminous flux	1200lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS


Codes

LSS LN3 51
LSS LW3 51

Structure

black
white

Certificazioni

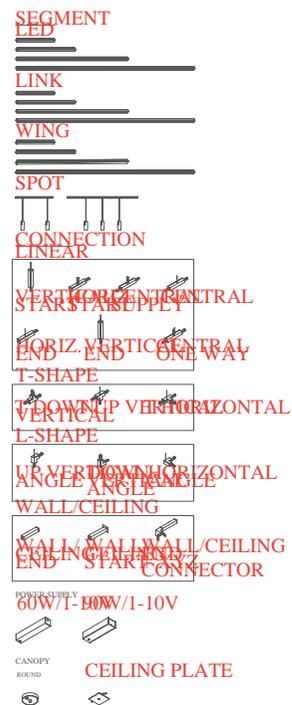

SEGMENT LED | 106 CM

LAMPING

Source	linear LED
Total power	24W
Emission	diffused, orientable 360°
Tension	24V DC
Color temperature	3000K
Luminous flux	2400lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS


Codes

LSS LN2 51
LSS LW2 51

Structure

black
white

Certificazioni

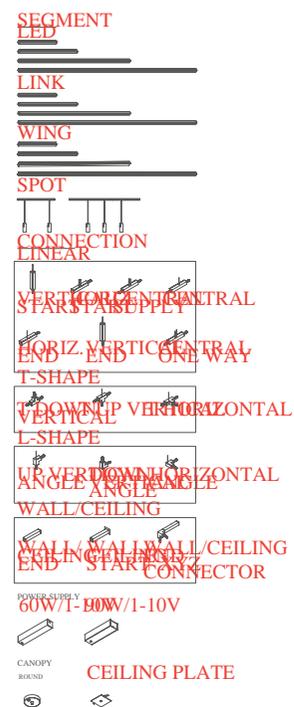

SEGMENT LED | 170 CM

LAMPING

Source	linear LED
Total power	40W
Emission	diffused, orientable 360°
Tension	24V DC
Color temperature	3000K
Luminous flux	3970lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS


Codes

LSS LW1 51
LSS LN1 51

Structure

white
black

Certificazioni

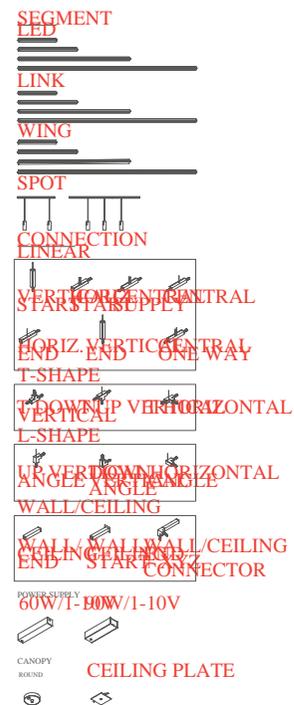

SEGMENT WING | 36 CM

LAMPING

Source	linear LED
Total power	6W
Emission	diffused, orientable 360°
Tension	24V DC
Color temperature	3000K
Luminous flux	430lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS


Codes

LSS UN4 51
LSS UW4 51

Structure

black
white

Certificazioni

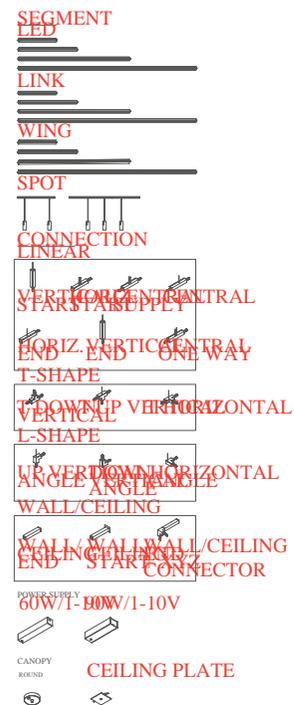

SEGMENT WING | 56 CM

LAMPING

Source	linear LED
Total power	12W
Emission	diffused, orientable 360°
Tension	24V DC
Color temperature	3000K
Luminous flux	24V DC
Typ cri	80
Energy class	A+


Codes

LSS UN3 51
LSS UW3 51

Structure

black
white

Certificazioni

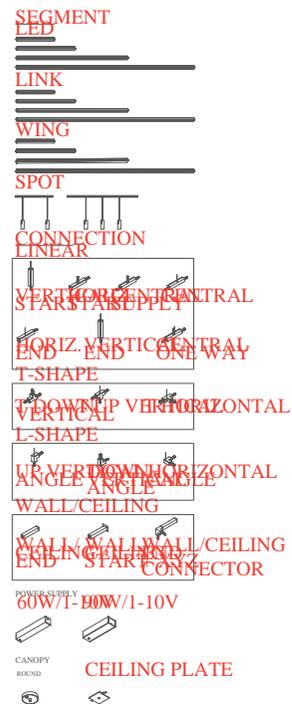

SEGMENT WING | 106 CM

LAMPING

Source	linear LED
Total power	24W
Emission	diffused, orientable 360°
Tension	24V DC
Color temperature	3000K
Luminous flux	2400lm
Typ cri	80
Energy class	A+


Codes

LSS UN2 51
LSS UW2 51

Structure

black
white

Certificazioni

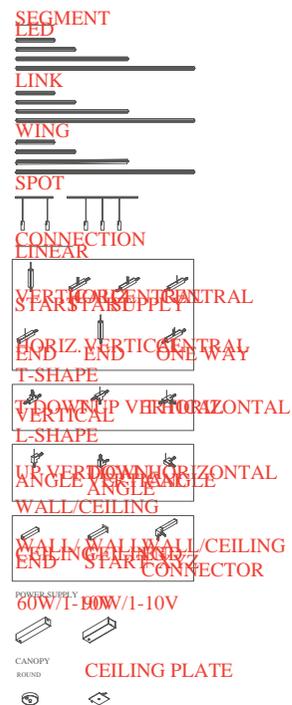

SEGMENT WING | 170 CM

LAMPING

Source	linear LED
Total power	40W
Emission	diffused, orientable 360°
Tension	24V DC
Color temperature	3000K
Luminous flux	3970lm
Typ cri	80
Energy class	A+
Materials	aluminium + PC + ABS


Codes

LSS UN1 51
LSS UW1 51

Structure

black
white

Certificazioni

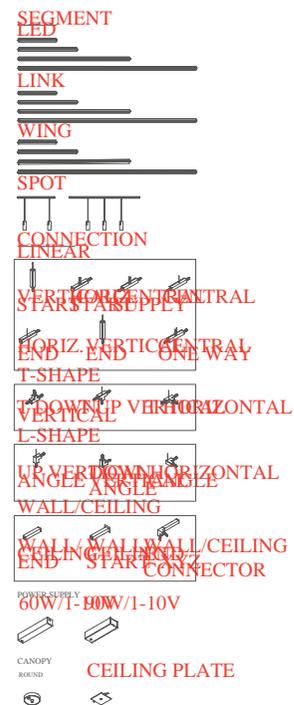

SEGMENT LINK | 36 CM

LAMPING

Materials aluminium + PC + ABS

Notes orientable 360°

Codes

LSS BN4 51


LSS BW4 51

Structure

black

white

Certificazioni

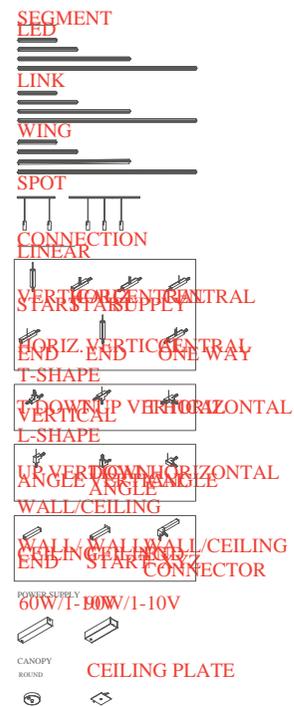

SEGMENT LINK | 56 CM

LAMPING

Notes orientable 360°

Codes

LSS BN3 51


LSS BW3 51

Structure

black

white

Certificazioni

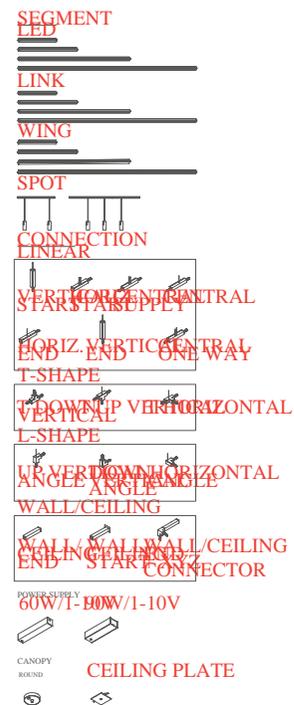

SEGMENT LINK | 106 CM

LAMPING

Notes orientable 360°

Codes

LSS BN2 51


LSS BW2 51

Structure

black

white

Certificazioni

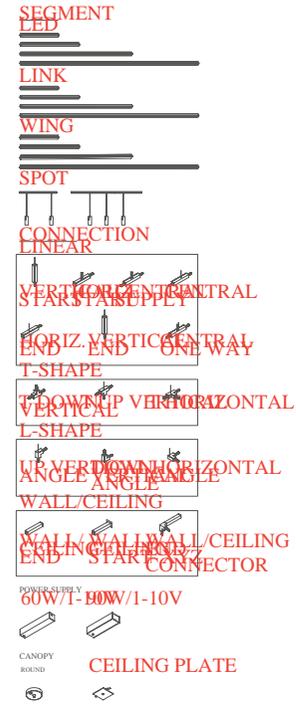

SEGMENT LINK | 170CM

LAMPING

Notes orientable 360°

Codes

LSS BN1 51


LSS BW1 51

Structure

black

white

Certificazioni

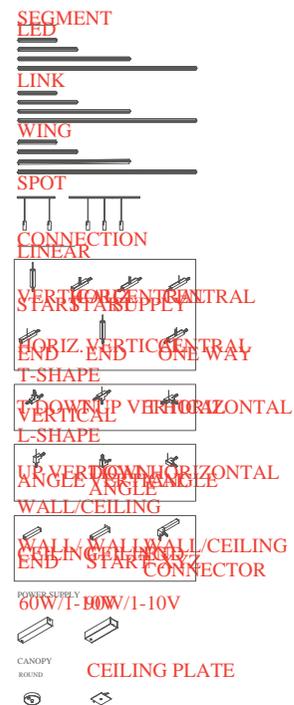

SEGMENT SPOT | 106CM

LAMPING

Source	Spot LED
Total power	3 x 4W
Emission	spot
Tension	24V DC
Color temperature	3000K
Luminous flux	3 x 500lm
Typ cri	90
Energy class	A+
Notes	orientable 90° / 340°


Codes

LSS SW2 51
LSS SN2 51

Structure

white
black

Certificazioni

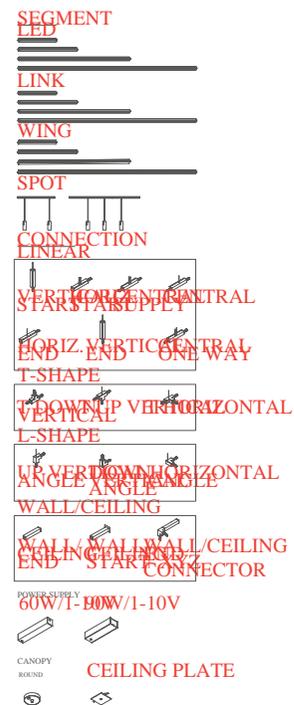

SEGMENT SPOT | 56CM

LAMPING

Source	Spot LED
Total power	2 x 4W
Emission	spot
Tension	24V DC
Color temperature	3000K
Luminous flux	2 x 500lm
Typ cri	90
Energy class	A+
Notes	orientable 90° / 340°


Codes

LSS SW1 51
LSS SN1 51

Structure

white
black

Certificazioni

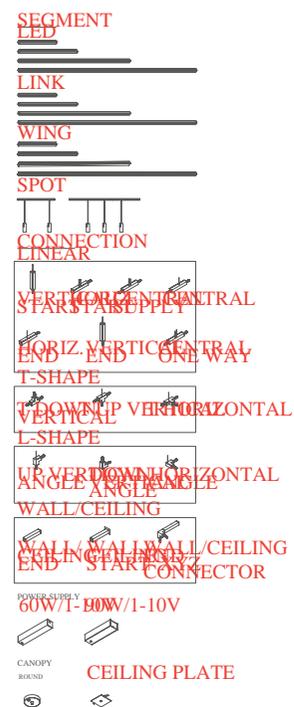

CONNECTION T-SHAPE | T DOWN VERTICAL

LAMPING

Notes orientable 360°

Codes

LSS TN1 51


LSS TW1 51

Structure

black

white

Certificazioni

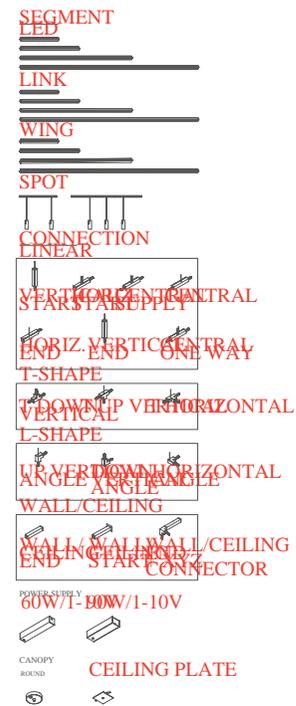

CONNECTION T-SHAPE | T UP VERTICAL

LAMPING

Notes

orientable 360°, Steel ceiling cable fixing,
cable length max 3m

Codes

LSS TN2 51


LSS TW2 51

Structure

black

white

Certificazioni

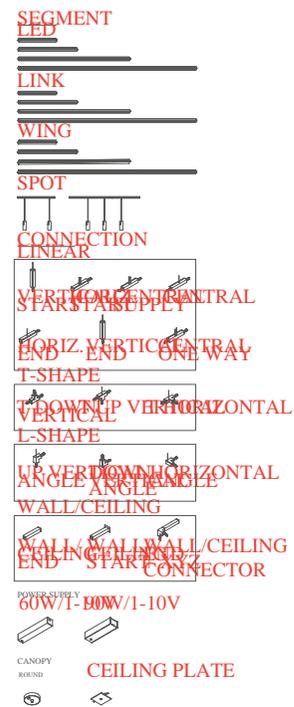

CONNECTION T-SHAPE | T HORIZONTAL

LAMPING

Notes

orientable 360°, steel ceiling cable fixing,
cable lenght max 3m

Codes

LSS TW3 51


LSS TN3 51

Structure

white

black

Certificazioni

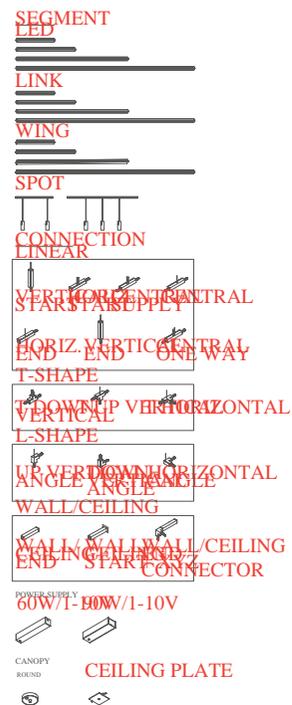

CONNECTION L-SHAPE | DOWN VERTICAL ANGLE

LAMPING

Notes orientable 360°

Codes

LSS AW2 51


Structure

white

LSS AN2 51

black

Certificazioni

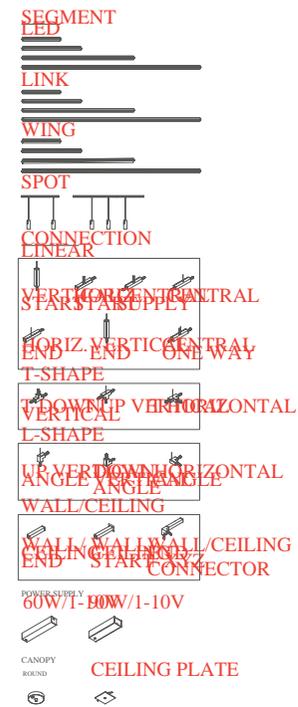

CONNECTION L-SHAPE | UP VERTICAL ANGLE

LAMPING

Notes

orientable 360°, Steel ceiling cable fixing, cable length max 3m

Codes

LSS AW1 51


LSS AN1 51

Structure

white

black

Certificazioni

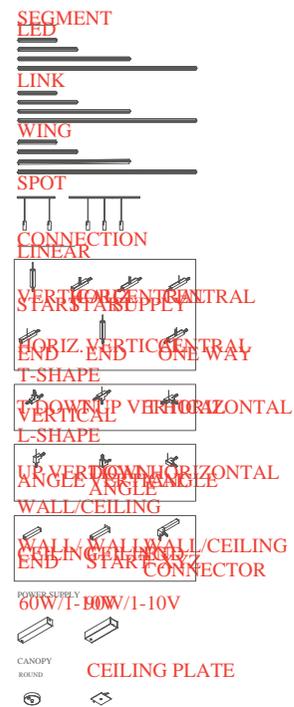

CONNECTION L-SHAPE | HORIZONTAL ANGLE

LAMPING

Notes

orientable 360°, Steel ceiling cable fixing, cable length max 3m

Codes

LSS AW3 51


LSS AN3 51

Structure

white

black

Certificazioni

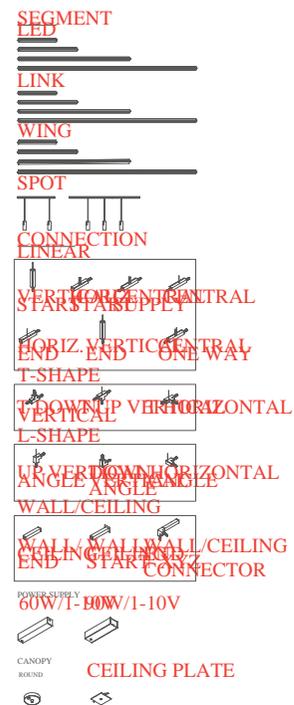

CONNECTION LINEAR | CENTRAL

LAMPING

Notes

Steel ceiling cable fixing, cable length max 3m

Codes

LSS CW5 51


LSS CN5 51

Structure

white

black

Certificazioni

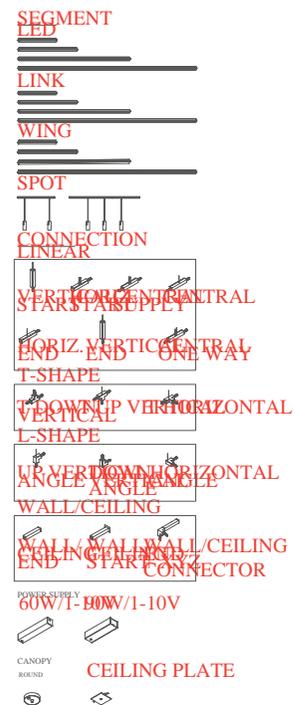

CONNECTION LINEAR | CENTRAL SUPPLY

LAMPING

Notes

Steel ceiling cable fixing, cable length max 3m
Steel ceiling cable fixing, cable length (steel and electrical cable) max 3m

Codes

LSS CW4 51


LSS CN4 51

Structure

white

black

Certificazioni

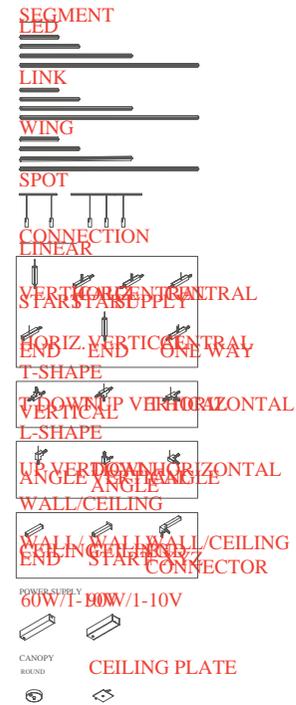

CONNECTION LINEAR | HORIZONTAL END

LAMPING

Notes

Steel ceiling cable fixing, cable length max 3m

Codes

LSS CN3 51


LSS CW3 51

Structure

black

white

Certificazioni

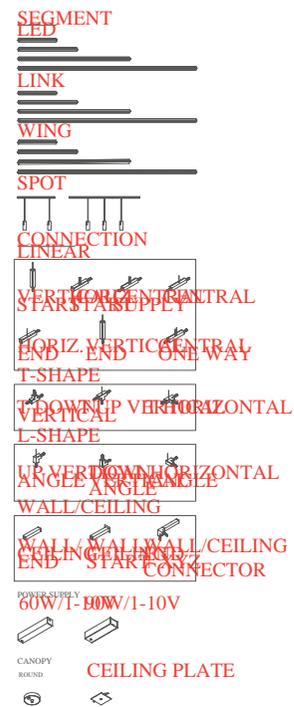

CONNECTION LINEAR | HORIZONTAL START

LAMPING

Notes

Steel ceiling cable fixing, cable length (steel and electrical cable) max 3m

Codes

LSS CN2 51


LSS CW2 51

Structure

black

white

Certificazioni

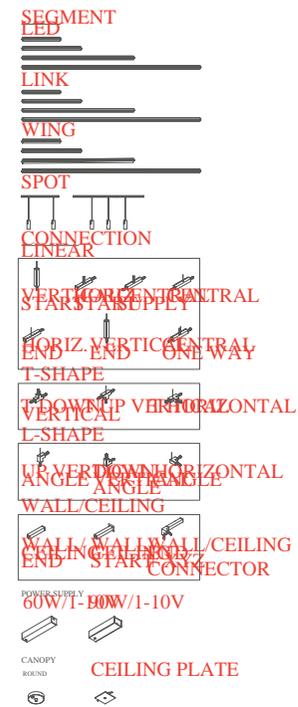

CONNECTION LINEAR | CENTRAL ONE WAY

LAMPING

Codes

LSS CW7 51

LSS CN7 51


Certificazioni



Structure

white

black

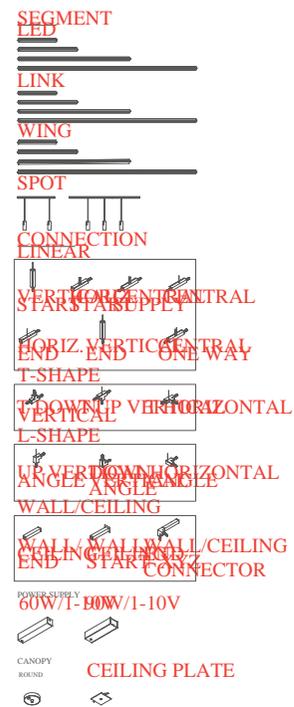

CONNECTION LINEAR | VERTICAL START

LAMPING

Notes cable lenght max 3m

Codes

LSS CW1 51


LSS CN1 51

Structure

white

black

Certificazioni

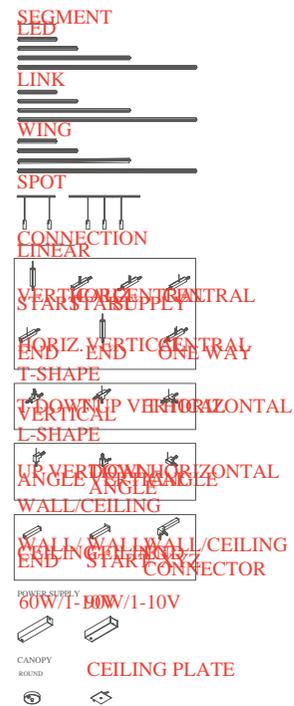

CONNECTION LINEAR | VERTICAL END

LAMPING

Notes

Steel ceiling cable fixing, cable length max 3m

Codes

LSS CN6 51


LSS CW6

Structure

black

white

Certificazioni

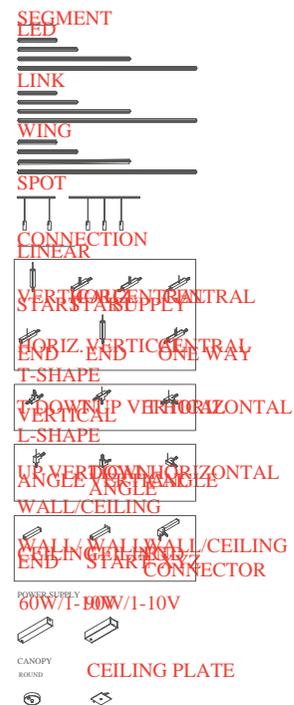

CONNECTION | WALL/CEILING END

LAMPING

Notes orientable 360°

Codes

LSS FW1 41


Structure

white

LSS FN1 41

black

Certificazioni

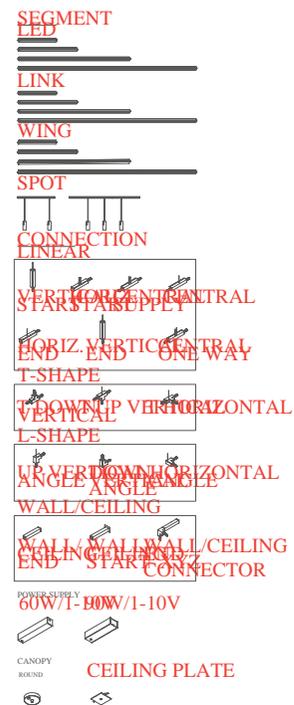

CONNECTION | WALL/CEILING END + XYZ CONNECTOR

LAMPING

Codes

LSS FW2 41


LSS FN2 41

Structure

white

black

Certificazioni

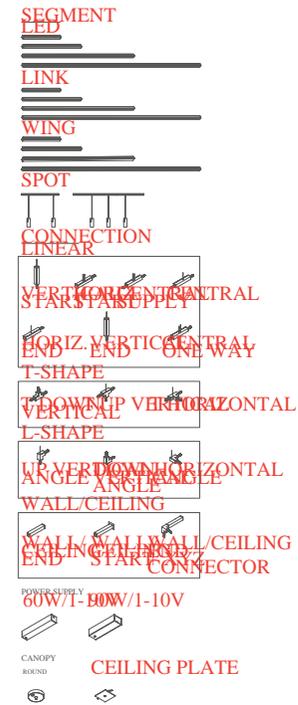

CONNECTION | WALL/CEILING START

LAMPING

Codes

LSS FN3 41

LSS FW3 41


Certificazioni



Structure

black

white

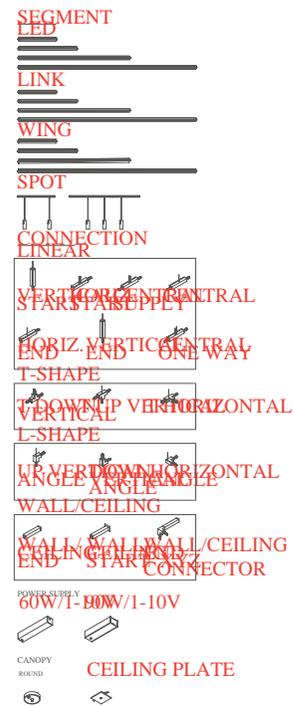

POWER SUPPLY | 60W-1-10V

LAMPING

Total power	60W
Switching	dimmable 1-10V
Tension	110/230V
Ip class	65
Dimensions	16x4x3


Codes

LSS PN6 51
LSS PW6 51

Structure

black
white

Certificazioni

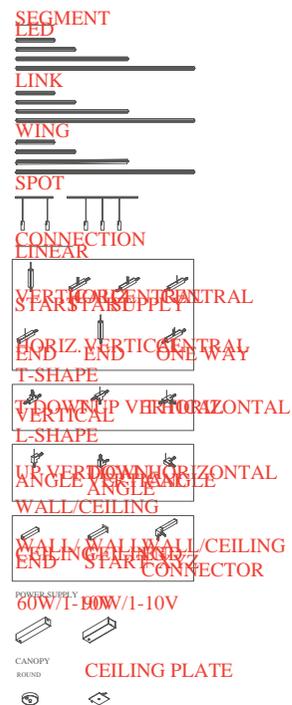

POWER SUPPLY | 90W-1-10V

LAMPING

Total power	90W
Switching	dimmable 1-10V
Tension	110 / 230V
Ip class	65
Dimensions	16x6x3


Codes

LSS PW9 51
LSS PN9 51

Structure

white
black

Certificazioni

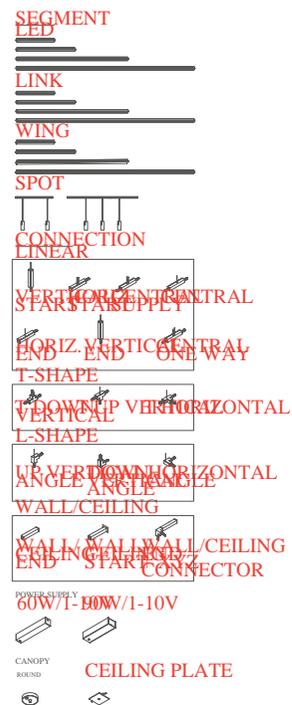

CANOPY | ROUND

LAMPING

Codes


ROS KNN 51

ROS KWW 51

Structure

black

white

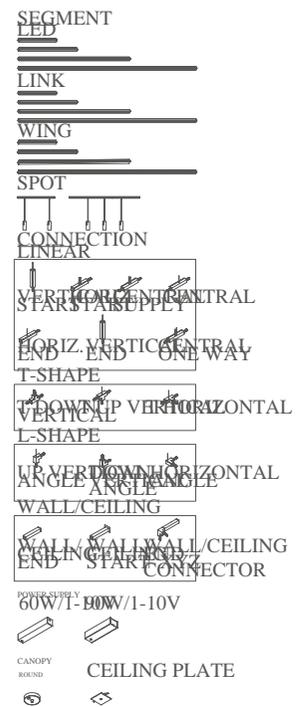

CANOPY | CEILING PLATE

LAMPING

Codes

LSS PNR 51

LSS PWR 51

Structure

black

white

