



- Luminaire for installation on wall – surface mounted.
- Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content) and AISI 304 stainless steel fixing plate. Glass diffuser: transparent with silkscreen border, fixed to the aluminium structure through a robotic gluing system.
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP65.
- In compliance with EN 60598-1 standards.
- Class of insulation: II.
- Installation: wiring through two rubber cable glands (5mm<math>\leq \varnothing < 9\text{mm}</math> cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

EU Regulation 874/2012 - Illumination equipment energy classes



LED VERSION:
Class A/A+/A++
Luminaire supplied
with integrated LED modules
that cannot be replaced



.1 White



.6 Grey



.3 Anthracite



.4 Black



.18 Deep Brown



Wall fitting




The fitting is
equipped with
2 cable input





Protection against
impact.
IK 02 - 0,20 joule

Marco Power LED / Unidirectional - Narrow Beam 10°




10723043 **A A+ A++**
 NATURAL WHITE 4000K
 POWER LED
 1,1W/100÷240V
 Total power 3W
 Lm LED 130 ≈ Lm OUTPUT 104
 CRI>80
 Integral electronic power supply


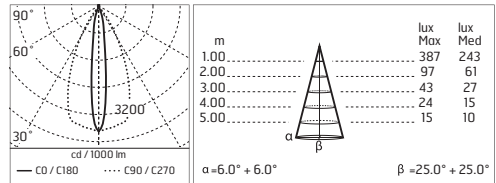


10711643 **A A+ A++**
 WARM WHITE 3000K
 POWER LED
 1,1W/100÷240V
 Total power 3W
 Lm LED 120 ≈ Lm OUTPUT 96
 CRI>80
 Integral electronic power supply

Marco Power LED / Unidirectional - Wide Beam 75°




10723050 **A A+ A++**
 NATURAL WHITE 4000K
 POWER LED
 1,1W/100÷240V
 Total power 3W
 Lm LED 130 ≈ Lm OUTPUT 105
 CRI>80
 Integral electronic power supply

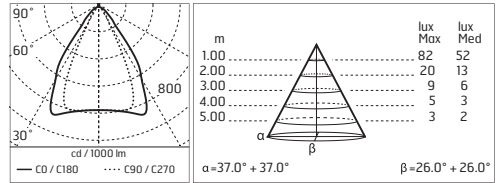

10711650 **A A+ A++**
 WARM WHITE 3000K
 POWER LED
 1,1W/100÷240V
 Total power 3W
 Lm LED 120 ≈ Lm OUTPUT 97
 CRI>80
 Integral electronic power supply






Marco Power LED / Bidirectional - Narrow Beam 10°



10723144 **A A+ A++**


NATURAL WHITE 4000K
 POWER LEDs
 2,2W/100÷240V
 Total power 4W
 Lm LED 2x130 ≠ Lm OUTPUT 2x104
 CRI>80
 Integral electronic power supply



10711944 **A A+ A++**




WARM WHITE 3000K
 POWER LEDs
 2,2W/100÷240V
 Total power 4W
 Lm LED 2x120 ≠ Lm OUTPUT 2x96
 CRI>80
 Integral electronic power supply

Marco Power LED / Bidirectional - Wide Beam 75°



10723151 **A A+ A++**


NATURAL WHITE 4000K
 POWER LEDs
 2,2W/100÷240V
 Total power 4W
 Lm LED 2x130 ≠ Lm OUTPUT 2x105
 CRI>80
 Integral electronic power supply



10711951 **A A+ A++**




WARM WHITE 3000K
 POWER LEDs
 2,2W/100÷240V
 Total power 4W
 Lm LED 2x120 ≠ Lm OUTPUT 2x97
 CRI>80
 Integral electronic power supply

Marco Power LED / Bidirectional - Combined: Narrow Beam 10° + Wide Beam 75°



10723153 **A A+ A++**



NATURAL WHITE 4000K
 POWER LEDs
 2,2W/100÷240V
 Total power 4W
 Lm LED 2x130 ≠ Lm OUTPUT 104+105
 CRI>80
 Integral electronic power supply




10712253 **A A+ A++**

WARM WHITE 3000K
 POWER LEDs
 2,2W/100÷240V
 Total power 4W
 Lm LED 2x120 ≠ Lm OUTPUT 96+97
 CRI>80
 Integral electronic power supply

Marco Power LED / Omnidirectional - Narrow Beam 10°





10723245 **A A+ A++**
 NATURAL WHITE 4000K
 POWER LEDs
 4,4W/100±240V
 Total power 7W
 Lm LED 4x130 ≠ Lm OUTPUT 4x104
 CRI>80
 Integral electronic power supply




1079245 **A A+ A++**
 WARM WHITE 3000K
 POWER LEDs
 4,4W/100±240V
 Total power 7W
 Lm LED 4x120 ≠ Lm OUTPUT 4x96
 CRI>80
 Integral electronic power supply

Marco Power LED / Omnidirectional - Wide Beam 75°




10723252 **A A+ A++**
 NATURAL WHITE 4000K
 POWER LEDs
 4,4W/100±240V
 Total power 7W
 Lm LED 4x130 ≠ Lm OUTPUT 4x105
 CRI>80
 Integral electronic power supply



1079252 **A A+ A++**
 WARM WHITE 3000K
 POWER LEDs
 4,4W/100±240V
 Total power 7W
 Lm LED 4x120 ≠ Lm OUTPUT 4x97
 CRI>80
 Integral electronic power supply

Accessories: Marco

237
 SPD: (SURGE PROTECTION DEVICE) 275Vac
 MAXIMUM DISCHARGE CURRENT 10kA(8/20µs)
 MAXIMUM OPERATING CURRENT 5A
 SUITABLE FOR SERIES CONNECTION - IP66



acc. code	▶	237
prod. code	▼	
1079245	●	
1079252	●	
10711643	●	
10711650	●	
10711944	●	
10711951	●	
10712253	●	
10723043	●	
10723050	●	
10723144	●	
10723151	●	
10723153	●	
10723245	●	
10723252	●	

