








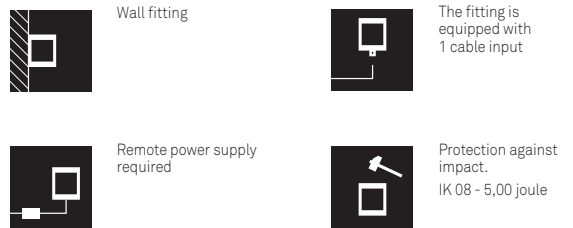


# JACKIE

- Luminaire for installation on wall – surface mounted.
- Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Glass diffuser: transparent.
- Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.
- Protection rating: IP54.
- In compliance with EN 60598-1 standards.
- Class of insulation: mains: I; low voltage: III.
- Installation: wiring through a rubber cable holder (5mm<math>< \lt; 10\text{mm}</math> cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable holder.

## EU Regulation 874/2012 - Illumination equipment energy classes




	<b>LED VERSION:</b> Class A/A+/A++ Luminaire supplied with integrated LED modules that cannot be replaced
	
	
	<b>HALOGEN VERSION:</b> Class B QR,CBC51/GU5,3
	<b>HALOGEN VERSION:</b> Class D QPARCBC51/GZ10





## Jackie / Transparent Glass



**842800**   
PAR 16 35W/230V GZ10







**843300**   
QR CBC 51 35W/12V GU5,3  
Remote transformer to be ordered



## Jackie CoB LED / Transparent Glass - Medium Beam 40° - Direct 230V




**8412801**   
WARM WHITE 3000K  
CoB LED  
5W/220÷230V  
Total power 6W  
Lm LED 688 ≈ Lm OUTPUT 327  
CRI>80  
LED module set up to work  
directly connected to the mains






**Accessories: Jackie**


**16**  
TRANSFORMER 50W  
230V/12V 50Hz IP 66




**17**  
TRANSFORMER 200W  
230V/12V 50Hz IP 66



**18**  
TRANSFORMER 300W  
230V/12V 50Hz IP 66



**237**  
SPD: (SURGE PROTECTION DEVICE) 275Vac  
MAXIMUM DISCHARGE CURRENT 10kA (8/20µs)  
MAXIMUM OPERATING CURRENT 5A  
SUITABLE FOR SERIES CONNECTION - IP66



acc. code ▶	16	17	18	237
prod. code ▼				
842800				
843300	•	•	•	
8412801				•