


REGULUS CEILING

Giancarlo Fassina and Carlo Forcolini

Range of fittings with a technical structure and two arms in extruded aluminium. Diffuser in white, transparent metacrylate. Aluminium parts can be painted in silver grey or, on demand, matt white. All versions (with the exception of the floor version) with uplight and downlight output, for an extremely functioning, widespread and adjustable lighting output.

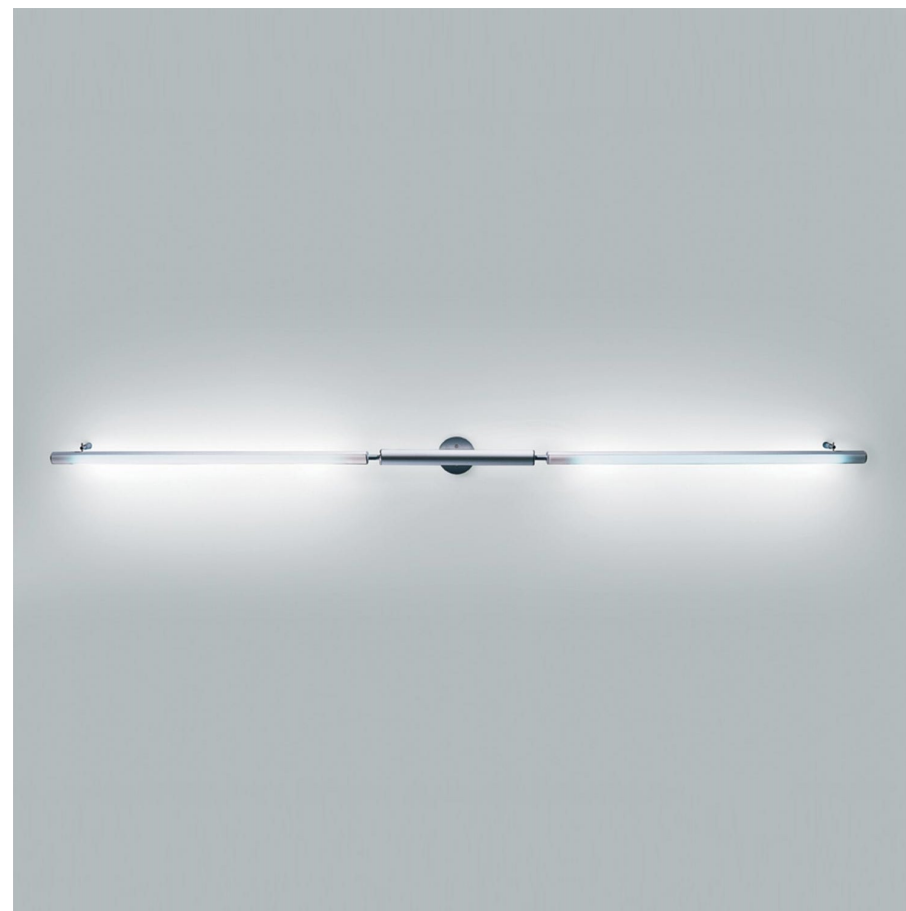

LED DIMMABLE

LAMPING

Source	linear LED
Total power	2x30W
Emission	direct
Switching	dimmable, DALI, push
Tension	230V
Color temperature	3000K
Luminous flux	2 x 3900lm
Typ cri	83
Energy class	A+
Materials	metal+PMMA

Codes

RED L3W 51

Structure

aluminium

PACKAGE

Package 01

27x15x264 cm / Gross weight: 4 Kg

Certificazioni

